

IGBT MODULE (L series)

■ Features

- High Speed Switching
- Low Saturation Voltage
- Voltage Drive

■ Applications

- Inverter for Motor Drive
- AC and DC Servo Drive Amplifier
- Uninterruptible Power Supply
- Industrial Machines, such as Welding Machines

■ Maximum Ratings and Characteristics

● Absolute Maximum Ratings

Items	Symbols	Ratings	Units
Collector-Emitter Voltage	V_{CES}	1200	V
Gate-Emitter Voltage	V_{GES}	± 20	V
Collector Current	Continuous	I_C	300
	1ms	$I_{C\ pulse}$	600
	Continuous	$-I_C$	300
	1ms	$-I_{C\ pulse}$	600
Max. Power Dissipation	P_C	2000	W
Operating Temperature	T_j	+150	°C
Storage Temperature	T_{stg}	-40 to +125	°C
Net. Weight		415	g
Isolation Voltage	AC. 1min.	V_{isol}	2500 V
Screw Torque	Mounting *1	35	kg·cm
	Terminals *2	45	
	Terminals *3	17	


● Electrical Characteristics (Tc=25°C)

Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Zero Gate Voltage Collector Current	I_{CES}	$V_{GE}=0V$ $V_{CE}=1200V$ $T_c=25^\circ C$			4.0	mA
		$V_{GE}=0V$ $V_{CE}=1200V$ $T_c=125^\circ C$			—	mA
Gate-Emitter Leakage Current	I_{GES}	$V_{CE}=0V$ $V_{GE}=\pm 20V$			400	nA
Gate-Emitter Threshold Voltage	$V_{GE(th)}$	$V_{CE}=20V$ $I_C=300mA$	3.0		6.0	V
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_{GE}=15V$ $I_C=300A$			3.5	V
Input Capacitance	C_{ies}	$V_{GE}=0V$		54000		pF
Output Capacitance	C_{oes}	$V_{CE}=10V$		—		
Reverse Transfer Capacitance	C_{res}	$f=1MHz$		—		
Turn-on Time	t_{on}	$V_{CC}=600V$		0.6	0.8	μs
	t_r	$I_C=300A$		0.4	0.6	
Turn-off Time	t_{off}	$V_{GE}=\pm 15V$		0.8	1.5	
	t_f	$R_G=2.7\Omega$		0.3	0.5	
Diode Forward On-Voltage	V_F	$I_F=300A$ $V_{GE}=0V$			2.5	V
Reverse Recovery Time	t_{rr}	$I_F=300A$ $-di/dt=900A/\mu s$ $V_{GE}=-10V$		200	350	ns


● Thermal Characteristics

Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance	$R_{th(j-c)}$	IGBT			0.063	°C/W
	$R_{th(j-e)}$	Diode			0.10	
	$R_{th(c-f)}$	With Thermal compound		0.0125		

■ Outline Drawings

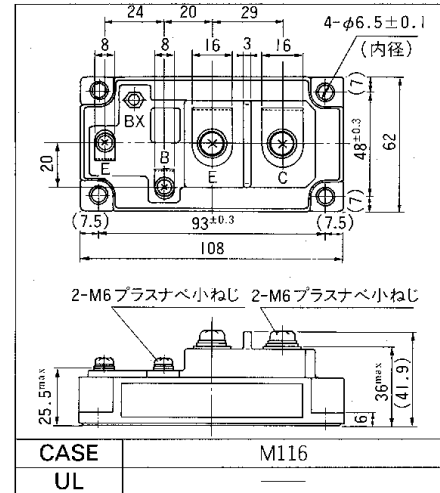


■ Equilavelent Circuit Schematic

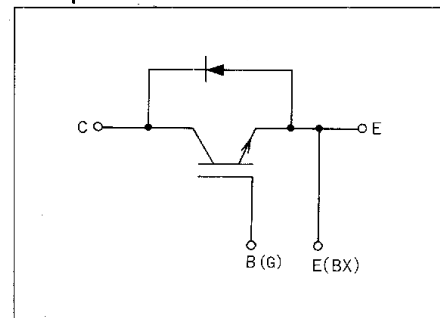


*1 Recommendable Value 25 to 35kg·cm (M5)

*2 Recommendable Value 35 to 45kg·cm (M6)


*3 Recommendable Value 13 to 17kg·cm (M4)

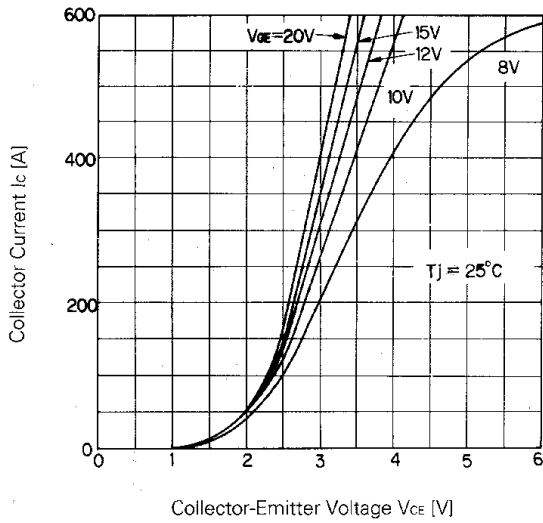


Collector Current vs. Collector-Emitter Voltage

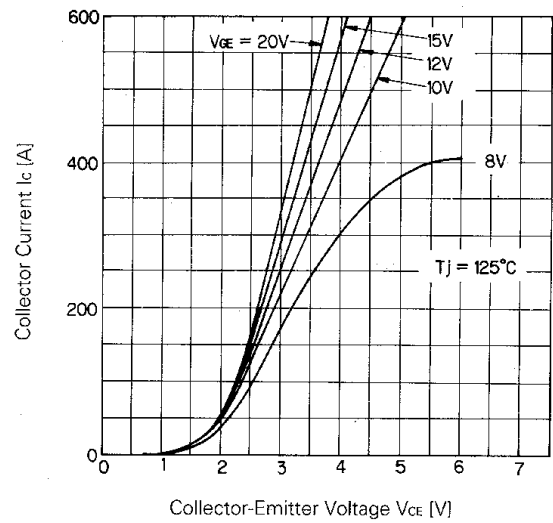


Collector Current vs. Collector-Emitter Voltage

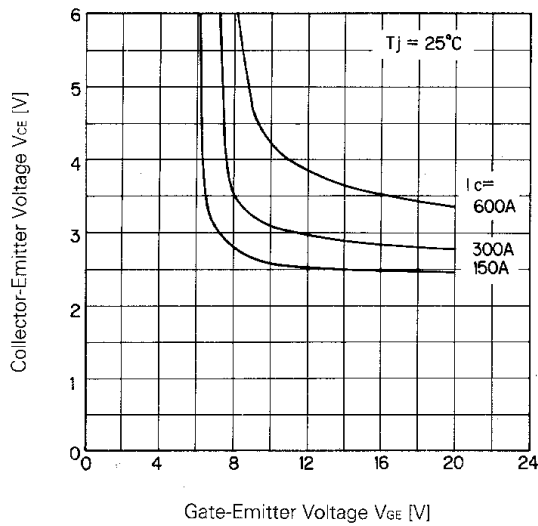


Collector-Emitter Voltage vs. Gate-Emitter Voltage

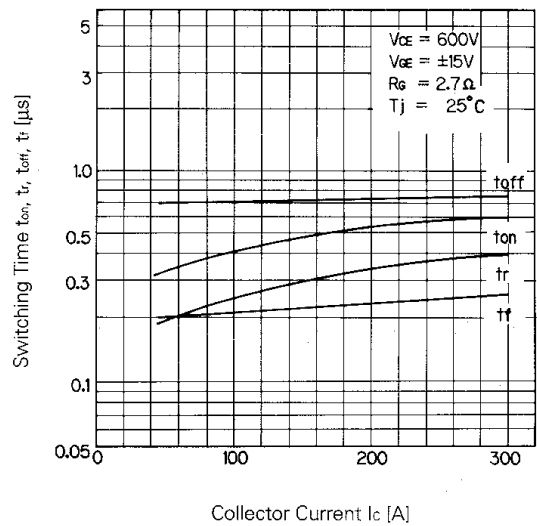


Switching Time

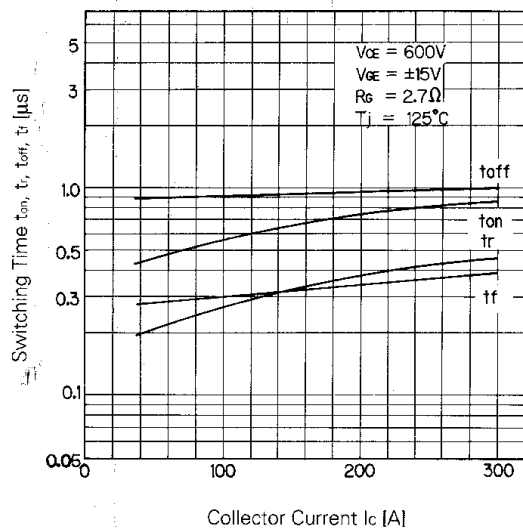


Switching Time

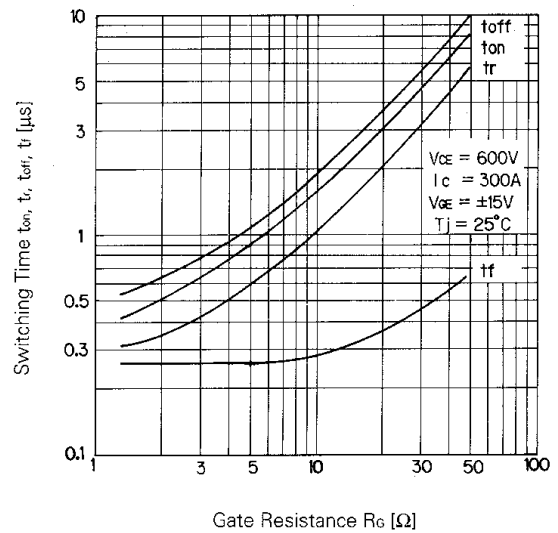


Switching Time-Gate Resistance

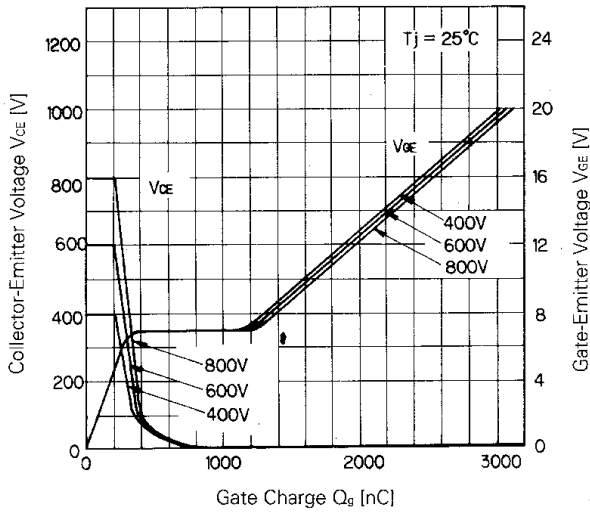


Dynamic Input Characteristic

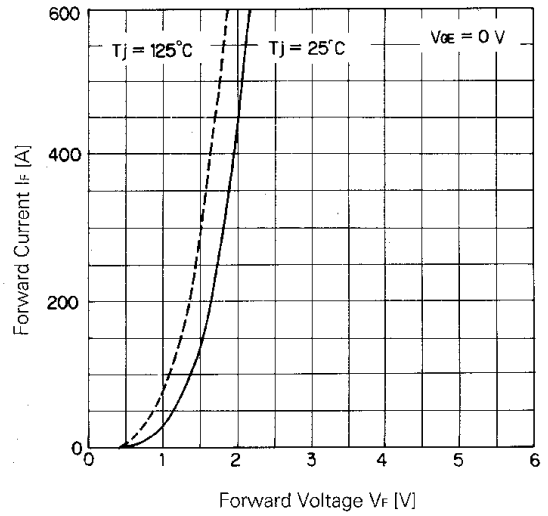


Forward Voltage of Free Wheel Diode

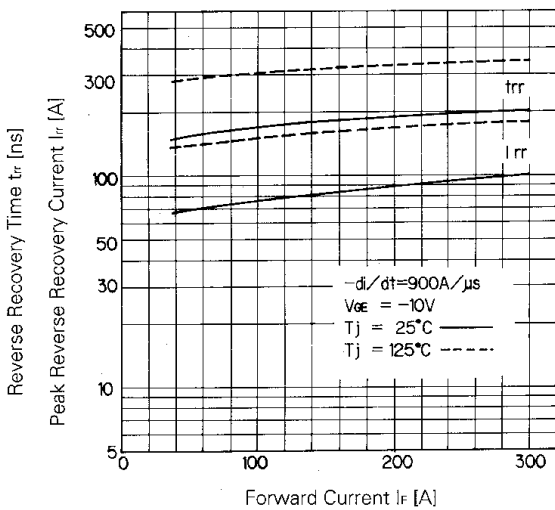


t_{rr} , I_{rr} - I_f

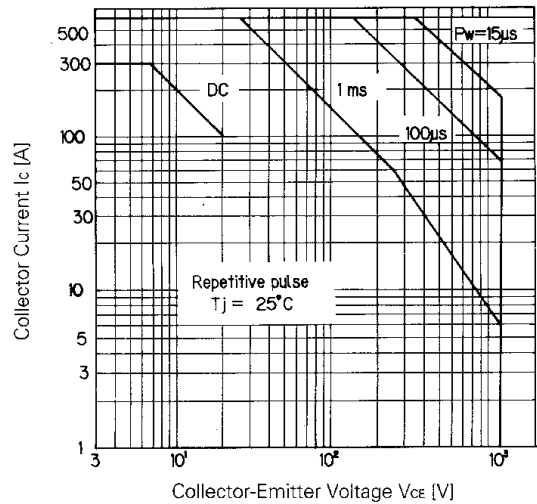

Safe Operating Area

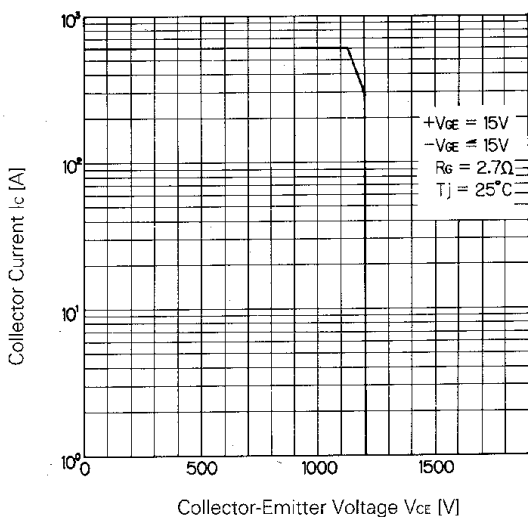

Reverse Biased Safe Operating Area

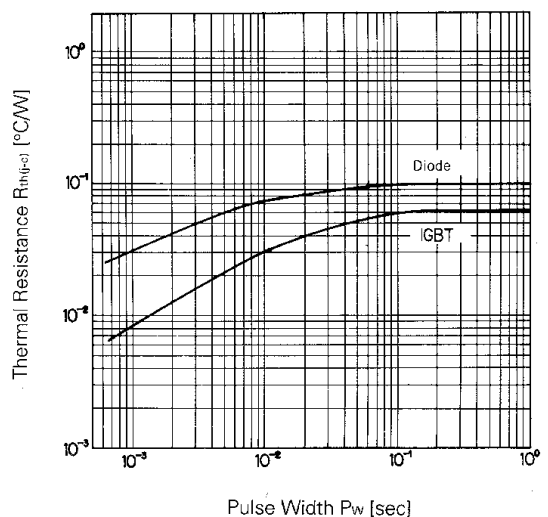

Transient Thermal Resistance

For more information, contact:

Collmer Semiconductor, Inc.

P.O. Box 702708

Dallas, TX 75370

972-733-1700

972-381-9991 Fax

<http://www.collmer.com>